
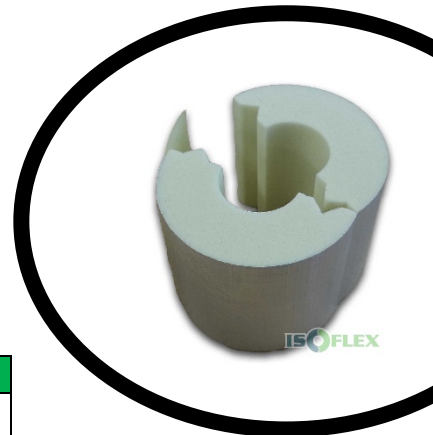


TECHNICAL DATA

(INSULATED PIPE SUPPORT PRODUCT-ALU COVERING)

- Type of material:** Polyurethane foam with rubber insulation on both sides and ALU covering, with self-adhesive
- Available forms:** Delivered with or without clamps
Depending on size may be three or more segments
- Width :** Inner $\varnothing <$ at 114 mm-50 mm
Inner $\varnothing \geq$ at 114 mm – 100 mm
- Area of use:** Cooling / heating systems, fixing technology
- Storage period:** 12 Months (above 10°C)

Physical properties	80 kg/m ³	120 kg/m ³
Temperature range	between -45 and 105°C	
Fireproof	B2 (according to DIN 4102)	
Water Vapour Resistance	$\mu > 7000$	
Storage Period	12 months >10°C	
Color	Gray	
Tolerance	inner +/- 0,5 mm ; outer +/- 1 mm	
λ (W/mK) EN 1602	0,021 – 0,040	
Biras pressure EN 826	0,67- 0,75	
Processing Temperature	around 10°C	

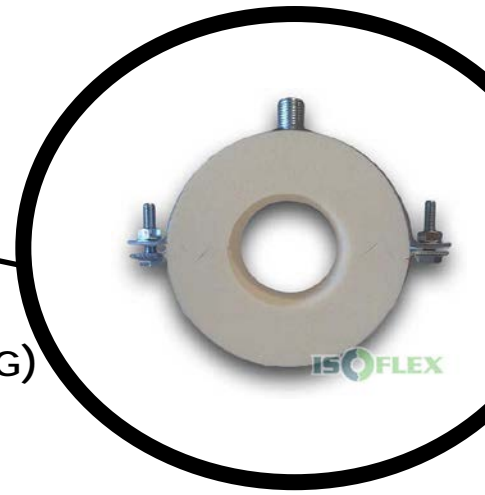

03.08.2015

Signature