

TECHNICAL DATA

(INSULATED PIPE SUPPORT PRODUCT- PVC COVER)

Type of material : Polyurethane foam with rubber insulation on both sides and PVC covering, with self- adhesive



Available forms : Delivered with or without clamps
Depending on size may be three or more segments

Width: Inner \varnothing < at 114 mm – 50mm
Inner \varnothing \geq at 114 mm – 100 mm

Area of use: Cooling / heating systems, fixing technology

Storage period: 12 months (above 10°C)

Physical properties	80 kg/m ³ rubber	120 kg/m ³ rubber
Temperature range	between -45 and 105°C	
Fireproof	B2 (according to DIN 4102)	
Water Vapour Resistance	$\mu > 7000$	
Storage period	12 months >10°C	
Color	Black	
Tolerance	inner +/- 0,5 mm; outer +/- 1 mm	
λ (W/mK) EN 1602	0,024-0,026	0,030-0,032
Biras pressure EN 826	0,67-0,75	1,9-2,1
Processing Temperature	around 10°C	

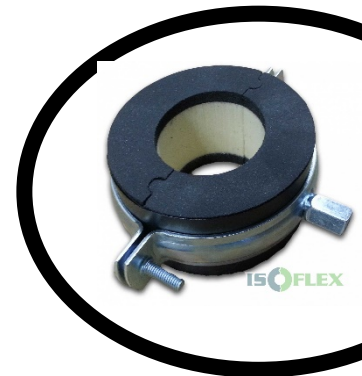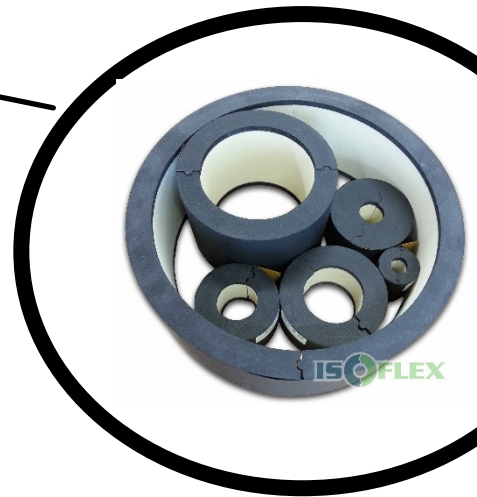

29.07.2015

Signature